



## LTC1314 SFF Optical Transceiver Gigabit Ethernet, 1310 nm, 1250 Mb/s, 40 km

### Product Description

The LTC1314 SFF Gigabit Ethernet LC duplex transceiver is intended for 40 km reach service in 1250 Mb/s 1310 nm single mode high-speed telecommunications equipment where low-cost, extraordinary performance and reliability is essential. It meets the requirements of IEEE802.3z 1000 BASE-LX, consumes low power, operates from a 3.3 volt DC power supply and is offered in the commercial, extended and industrial temperature ranges. The industry standard 2x5 small form factor (SFF) package is fabricated with a rugged die cast metal housing and cage assembly. The low jitter and low bit error rate optical assembly features a 1310 nm DFB laser transmitter and PIN/TIA receiver. It incorporates the SFF MSA LVTTTL Rx\_Signal Detect (Rx\_SD) and Tx Disable (Tx\_DIS) monitor and control functions. The differential AC coupled Tx and Rx data interfaces (50 ohms to ground, 100 ohms line to line) are LVPECL compatible. The device is Class I laser safety compliant.



### Applications

- 1250 Mb/s Gigabit Ethernet data links
- Channel extenders
- Bus extenders
- High speed I/O file servers
- Data storage networks
- LAN
- SAN
- RSAN
- Host adapters
- Switch-to-switch interfaces
- Mass storage system interconnects
- Hub interconnects
- Router interconnects
- Distributed multi processing
- Telecom switches

### Features

- LC Duplex optical interface
- 40 km reach
- 1250 Mb/s data rate
- +3.3 V power supply
- Low DC power consumption
- 2x5 SFF MSA compliant package
- High performance 1310 nm DFB laser
- High sensitivity PIN/TIA optical receiver:
- Single Mode operation
- BER <  $1 \times 10^{-12}$   
( $2^7 - 1$  NRZ PRBS test pattern)
- IEEE 802.3z 1000 BASE-LX compliant
- Operating temperature range options:
  - Commercial: 0 to 70°C
  - Extended: -10 to 80°C
  - Industrial: -40 to 85°C
- Monitor and Control Functions
  - Signal Detect (Rx\_SD), LVTTTL
  - Tx Disable (Tx\_DIS), LVTTTL
- Internally AC coupled and terminated
- LVPECL Rx and Tx data interface
  - 100 Ohms differential (line to line)
  - 50 Ohms single ended (line to ground)



## LTC1314 SFF Optical Transceiver Gigabit Ethernet, 1310 nm, 1250 Mb/s, 40 km

Absolute Maximum Ratings				
Parameter	Symbol	Minimum	Maximum	Units
Storage Temperature	$T_{stg}$	-40	+85	°C
Relative Humidity - Storage	$RH_S$	0	95	%
Relative Humidity - Operating	$RH_O$	0	85	%
DC Supply Voltage	$V_{CC}$	0	3.6	V
Soldering Temperature	$T_{slid}$	0	260	°C
Soldering Time Duration	$t_{slid}$	0	10	seconds
Optical and Electrical Signal Absolute Maximum Ratings				
Signal / Data Input Voltage (Tx_DATA)	$V_{IN\ PK-PK}$	0.3	2.4	V pk-pk
Rx Optical Input Power	$P_{IN-MAX}$	-	-3	dBm
Logic State Absolute Maximum Ratings				
Tx_DISABLE Logic HIGH State	Tx_DIS	-	$V_{CC} + 0.5$	V
Rx_SD Logic HIGH State	Rx_SD	-	$V_{CC} + 0.5$	V

Recommended Operating Conditions						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Ambient Operating Temperature	$T_{amb}$	0	25	+70	°C	Temperature Range = C
		-10	25	+80	°C	Temperature Range = E
		-40	25	+85	°C	Temperature Range = H
DC Supply Voltage	$V_{CC}$	3.14	3.30	3.46	Volts	
Module Supply Current	$I_{IN}$	-	150	200	mA	
Power Dissipation	$P_D$		500	700	mW	

Ordering Information	
Ambient Operating Temperature	Commercial, Extended or Industrial

Part Number	Temperature Option (Y)	
<b>LTC1314 X</b>	C	0 to 70°C
	E	-10 to 80°C
	H	-40 to 85°C



# LTC1314 SFF Optical Transceiver

## Gigabit Ethernet, 1310 nm, 1250 Mb/s, 40 km

Transmitter Logic							
Parameter	Function	Logic State	Logic Type	Min	Max	Units	Notes
Tx DIS	DISABLE	HIGH	LVTTL	2.4	3.3	V	
Tx DIS	ENABLE	LOW	LVTTL	0	0.8	V	

Receiver Logic							
Parameter	Function	Logic State	Logic Type	Min	Max	Units	Notes
Rx_SD	SIGNAL DETECT	HIGH	LVTTL	2.4	3.3	V	
Rx_SD	NORMAL	LOW	LVTTL	0	0.8	V	


Transmitter Electro-Optical Characteristics						
Parameter	Symbol	LTC1314			Units	Notes
		Min	Typ	Max		
Transmitter Type		1310 nm DFB				
Optical Output Power	$P_o$	-2	0	3	dBm	Average Optical Output
Center Wavelength	$\lambda$	1270	1310	1355	nm	
Spectral Line Width @ -20dB	$\Delta\lambda$	-	-	1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	9	-	-	dB	
Optical Rise and Fall Time	$t_r, t_f$	-	150	260	ps	20% - 80%
Relative Intensity Noise	RIN	-	-	-120	dB/Hz	
Deterministic Jitter	DJ	-	-	0.2	UI	
RMS Jitter	$J_{RMS}$	-	0.03	-	UI	
Output Eye		IEEE 802.3z 1000 BASE-LX Compliant				
Tx Differential Input Impedance	$Z_{in}$	-	100	-	Ohms	
Tx Differential Input Voltage	$V_{IN}$	300	-	2400	mV p-p	LVPECL Tx DATA (Note 1)
Note 1: Internally AC coupled and terminated						



**Receiver Electro-Optical Characteristics**


Parameter	Symbol	LTC1314			Units	Notes
		Min	Typ	Max		
Receiver Type		PIN / TIA				
Receiver Optical Sensitivity	$P_{IN}$	-	-	-23	dBm	Average Received Power (Note 1)
Receiver Optical Overload	$P_{INMAX}$	-	-	-3	dBm	
Center Wavelength	$\lambda$	1270	1310	1355	nm	
Optical Return Loss	RL	12	-	-	dB	
Rx Upper 3 dB Cutoff Frequency	$f_c$	-	-	1500	MHz	
Signal Detect - Assert	$P_{SDA}$	-28.5	-	-25	dBm	
Signal Detect- Deassert	$P_{SDD}$	-29	-	-25.5	dBm	
Signal Detect - Hysteresis	$P_H$	0.5	2	5	dB	
Data Output Rise / Fall Time	$t_r / t_f$		150	-	ps	20 - 80 %
Rx Differential Load Impedance	$Z_{LOAD}$	-	100	-	Ohms	
Rx Differential Output Voltage	$V_{OUT}$	400	-	1200	mV p-p	LVPECL Rx DATA (Note 2)
Note 1: Average received power where the BER = $10^{-12}$ , measured with a $2^7-1$ NRZ test pattern						
Note 2: Internally AC coupled and terminated						

**Eye Diagram**

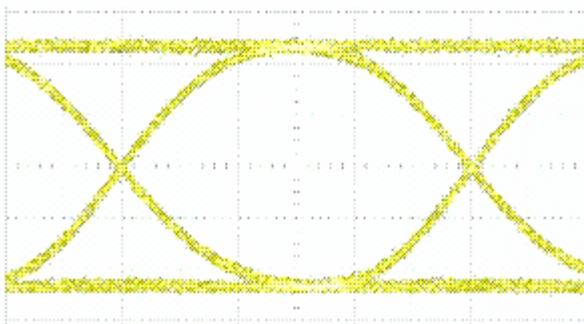

**Transmitter Test Conditions**

- Optical Output Power = **-2 dBm**
- Test Pattern =  $2^7-1$  NRZ PRBS

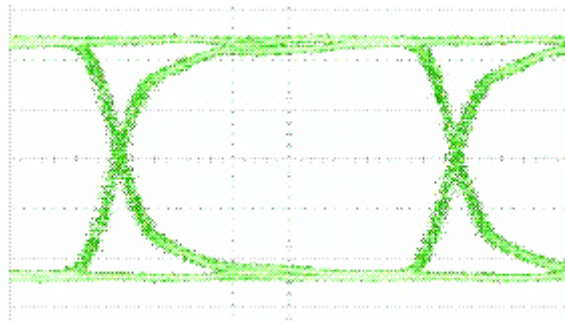

**Receiver Test Conditions**

- Optical Input Power = **-17 dBm**
- Test Pattern =  $2^7-1$  NRZ PRBS




#### Transceiver Block Diagram

##### Transmitter Section

The transmitter section consists of a high reliability 1310 nm DFB laser diode (LD) with back facet monitor photo detector (PD) in an eye safe optical sub-assembly (TOSA), which is mated to the Tx port of the fiber optic LC duplex receptacle. A driver IC converts LVPECL differential input data signals into an analog current source that drives the LD. The transmitter is provided with the Tx\_Disable control function.

##### Receiver Section

The receiver section consists of a high-speed InGaAs PIN photodiode (PD) and transimpedance preamplifier mounted in an optical subassembly (ROSA), which is mated to the Rx port of the fiber optic LC duplex receptacle. The output of the PD drives the post-amplification, quantizing, and optical signal detection circuits. The receiver is equipped with the Rx\_SD (Signal Detect) monitoring function.

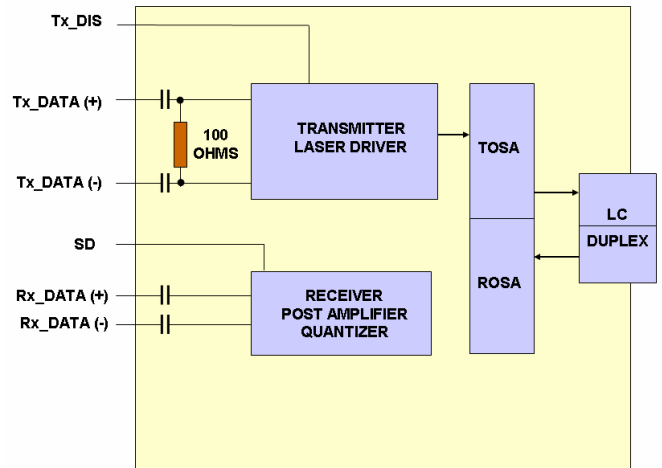

#### Transceiver Monitor and Control Functions

##### Rx Signal Detect (SD) Description


The Rx\_SD (Signal Detect) is an LVTTTL monitor port. It switches state based on the received optical input signal level that passes through the photo detector (PD), post amplifier and quantizer. If the received signal is above the Rx threshold, then Rx\_SD is set HIGH indicating normal operation. If the received signal is below the Rx threshold, then Rx\_SD is set LOW indicating a possible broken fiber, unplugged connector or no Tx signal from the host.

##### Tx Disable (Tx\_DIS) Description

The Tx\_DIS (Transmit Disable) is an LVTTTL control port that is controlled by a logic signal on the host (system) printed circuit board. If the system is ready to send data then the Tx\_DIS line is set LOW to enable the laser driver and the laser transmitter. If the system is not ready to send data, then the Tx\_DIS line is set HIGH to disable the transmitter.



SFF PIN ASSIGNMENT		
Pin	Symbol	Description
1	V <sub>EER</sub>	Receiver Signal Ground
2	V <sub>CCR</sub>	+3.3 Volt Receiver Power Supply
3	SD	Signal Detect, LVTTTL, LOW= No Signal, HIGH = Normal
4	RD-	Rx Data - Inverted Differential Output
5	RD+	Rx Data - Non Inverted Differential Output
6	V <sub>CCT</sub>	+3.3 Volt Transmitter Power Supply
7	V <sub>EET</sub>	Transmitter Signal Ground
8	Tx_DIS	Transmit Disable, LVTTTL, LOW = Normal, HIGH = Transmitter Disabled
9	TD+	Tx Data - Non Inverted Differential Input
10	TD-	Tx Data - Inverted Differential Input
Mounting Posts		The mounting posts are provided for mechanically attaching the transceiver to the circuit board. They should not be connected to the circuit ground but can be connected to the chassis ground.
Housing Leads		The housing leads should be connected to circuit ground

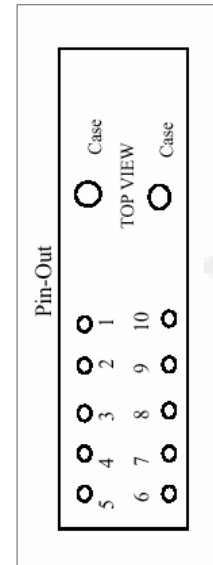


**Transceiver Pin Locations**

**Notes**


1. The uncommitted SD and Tx\_DIS LVTTTL monitor and control pins each require a pull up resistor of 4.7K to 10K Ohms.
2. The 100 Ohm differential Rx Data output is internally AC coupled and must be terminated with 100 Ohms at the differential user interface.
3. The 100 Ohm differential Tx Data input is internally AC coupled and terminated.

**Electrical Interface**

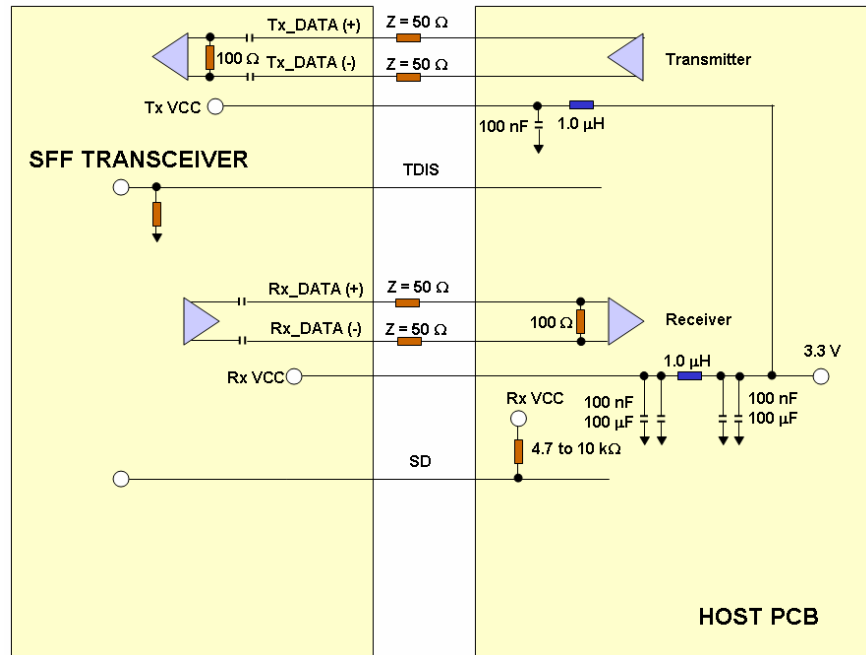




**Mechanical Specifications**

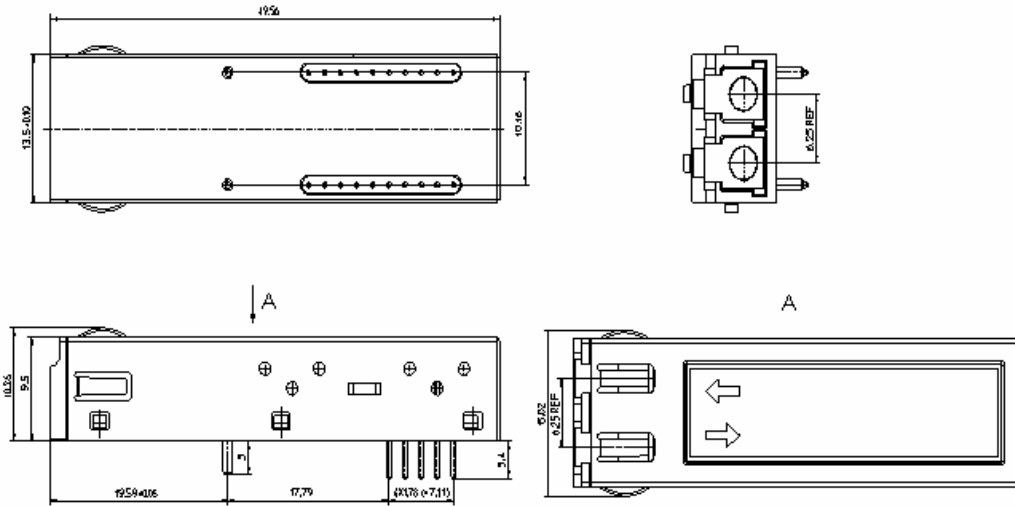


Dimensions are in millimeters  
Dimension tolerance is  $\pm 0.1$ mm unless otherwise specified

**Circuit Board Layout (MSA)**

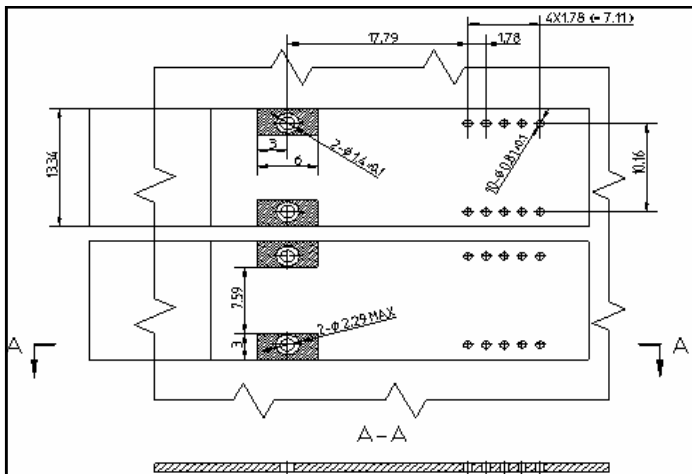

**Front Panel Layout (MSA)**

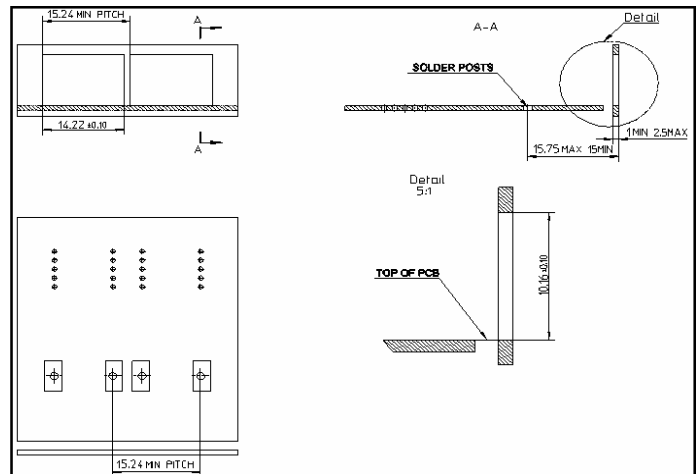

### Regulatory Information

#### Eye Safety

The transceiver is a Class 1 eye-safe device according to FDA 21CFR1040.10 and IEC 60825-2.

#### Electromagnetic Interference (EMI), Immunity and Product Safety

The transceiver is ESD safe (electrical pins) when tested according to MIL-STD-883, Method 3015.7 and ESD safe (optical connector) when tested according to IEC 61000-4-2. The device is immune to strong RF fields when tested in accordance with IEC 61000-4-3. The device complies with (US) FCC, Part 15, Subpart J; (Europe) CENELEC EN 55022; (Canada) Class B (CISPR22A); and (Japan) VCCI Class 1. The device has been designed to conform to product safety requirements including UL1950, CSA 22.2, and IEC 60950-1, and has been designed to meet the flammability requirements of UL94.


#### Notice

The factory has made all adjustments to this device prior to shipment. No adjustments or modifications to the device are required or permitted. Any adjustment, modification or tampering of the device voids the product warranty. The US Food and Drug Administration may consider that any adjustment or modification to this device is an act of manufacturing and therefore will require that the device be recertified in accordance with 21 CFR 1040.10 Subpart j.


#### Laser Radiation Information

Wavelength	1310 nm
FDA Total Pout: 7 mm aperture at 20 cm distance	< 195 microwatts
IEC Total Pout : 7 mm aperture at 10 cm distance	< 15,600 microwatts
Beam Divergence	17.25°

#### Required Label



#### Laser Emission



### Ligent Sales Offices - USA

#### Ligent Photonics, Inc.

2701 Dukane Drive  
Suite 200  
St. Charles, IL 60174  
PH (630) 513-7226  
FX (630) 513-9173  
WS [www.ligentphotonics.com](http://www.ligentphotonics.com)

#### Ligent Photonics, Inc.

(Virginia Sales Office)  
8210 Strathmore Lane  
Roanoke, VA 24019  
PH (540) 797-5793  
FX (540) 366-5793  
WS [www.ligentphotonics.com](http://www.ligentphotonics.com)

#### New Age Electronics

3000 Northwood's Parkway  
Suite 280  
Norcross, GA 30071  
PH (770) 242-8800  
FX (770) 242-8180  
WS [www.newagelec.com](http://www.newagelec.com)

#### New Age Electronics

8376 Six Forks Road  
Suite 202  
Raleigh, NC 27615  
PH (919) 866-0620  
FX (919) 866-0621  
WS [www.newagelec.com](http://www.newagelec.com)

#### New Age Electronics

4940 Corporate Drive  
Suite B  
Huntsville, AL 35805  
PH (256) 430-8000  
FX (256) 430-8414  
WS [www.newagelec.com](http://www.newagelec.com)

#### K-Tech Sales

100 Century Center Court  
Suite 405  
San Jose, CA 95112  
PH (408) 437-1808  
FX (408) 437-1883  
WS [www.ktechsales.com](http://www.ktechsales.com)

#### Kruvand Associates

1202 Richardson Drive  
Suite 113  
Richardson, TX 75080  
PH (972) 437-3355  
FX (972) 680-8854  
WS [www.kruvand.com](http://www.kruvand.com)

#### Kruvand Associates

8100 Shoal Creek Boulevard  
Suite 250  
Austin, TX 75080  
PH (512) 454-1111  
FX (512) 454-9858  
WS [www.kruvand.com](http://www.kruvand.com)

#### Kruvand Associates

10601 Grant Road  
Suite 104  
Houston, TX 77070  
PH (713) 956-6741  
FX (713) 972-680-8854  
WS [www.kruvand.com](http://www.kruvand.com)

#### VAL Technical Sales

183 Prospect Street  
Hingham, MA 02043  
PH (781) (781) 749-8358  
FX (781) 740-4663  
WS [www.valtechnical.com](http://www.valtechnical.com)

### Ligent Sales Offices - Asia

#### Hisense Optoelectronics Technology Co., Limited

No.11, Jiangxi Road  
Qingdao, Shandong  
China 266071  
PH 86 (532) 601-0000  
FX 86 (532) 601-6007  
WS [www.hisenseopto.com](http://www.hisenseopto.com)

#### Summit Hisense Company, Limited

Triton Square  
Office Tower Z 19F 1-8-12  
Harumi Chuo-ku 104-6219  
Japan  
PH 81-3-5547-1252  
FX 81-3-5547-1268