




#### Product Description

The LTG1302 GBIC hot-pluggable single mode duplex optical transceiver is designed for 10 km reach applications in high speed 1062.5 or 1250 Mb/s Fibre Channel or Gigabit Ethernet LAN and SAN optical communications equipment where low-cost, low power consumption, extraordinary performance and reliability are essential. It is housed in an MSA compliant GBIC form factor package with an integral SC duplex optical receptacle and is capable of working from either a 3.3 or 5.0 volt power source. It incorporates the standard TTL / LVTTTL monitor and control functions: Rx\_LOS, Tx\_Disable and Tx\_Fault. The Rx\_DATA output and Tx\_DATA input lines are differential PECL / LVPECL compatible. It is IEEE 8023z/D2 and ITU-T G.957 compliant. The Class 1 laser transmitter incorporates a high-performance 1310 nm F-P optical subassembly, which meets the requirements of the international laser safety standard IEC6082-5. The receiver incorporates a InGaAs PIN photodiode coupled to a high sensitivity TIA that drives the quantizer electronics consisting of the post amplifier, signal detection and TTL logic interface.

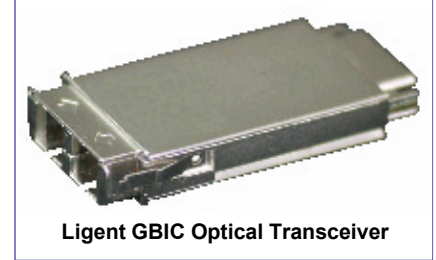

Ligent GBIC Optical Transceiver

#### Applications

- 1.0625 Gb/sec Fibre Channel data links
- 1.25 Gb/sec Gigabit Ethernet data links
- Channel extenders and data storage networks
- Bus extenders
- High speed I/O file servers
- Storage Area Networks (SANs)
- LANs and RSANs
- Host adopter and mass storage system interconnects
- Switch to switch interfaces and hub interconnects
- Distributed multi processing
- Telecom switches and router interconnects

#### Features

- Auto Select Power Supply
  - 3.3 or 5.0 Volt Operation
- Low power consumption
- Single-Mode Operation
- SC Duplex Interface
- 1310 nm F-P Laser Transmitter
- InGaAs PIN / TIA Receiver
- Hot-pluggable
- 10 km Reach
- TTL / LVTTTL Monitor and Control Functions
  - Rx\_LOS
  - Tx\_FAULT
  - Tx\_DIS
- TTL / LVTTTL Serial ID Functions
  - MOD DEF (0)
  - MOD DEF (1)
  - MOD DEF (2)
- PECL / LVPECL Differential I/O
- Rx\_DATA
- Tx\_DATA
- IEEE802.3x/D2 Compliant
- FC-PI-2-100-SM-LC-L Compliant
- ITU-T G.957 compliant
- IEC60825 Class 1 Laser Safety Compliant
- Operating Temperature Range:
  - 0 to 70 degrees centigrade

#### HOW TO ORDER

Part Number	Description
<b>LTG1302</b>	1062.5 / 1250 Mb/s GBIC optical transceiver, single mode, 10 km reach, SC duplex optical receptacle, dual mode power supply, 0 to 70°C operating temperature range



Absolute Maximum Ratings					
Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	$T_{stg}$	-40	85	°C	
Operating Temperature	$T_{amb}$	0	70	°C	
Relative Humidity - Storage	$RH_S$	0	95	%	
Relative Humidity - Operating	$RH_O$	0	95	%	
Soldering Temperature	$T_{sld}$	0	260	°C	
Soldering Time Duration	$t_{sld}$	0	10	seconds	
DC Supply Voltage	$V_{CC}$	-0.5	6.0	VDC	


Recommended Operating Conditions						
Parameter	Symbol	Min	Typ	Max	Units	Notes
DC Supply Voltage	$V_{CC}$	3.15	-	5.25	Volts	
Total Module Supply Current ( $I_{TX}+I_{RX}$ )	$I_{CC}$	-	175	300	mA	

Transmitter Electro-Optical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical Output Power	$P_{OUT}$	-10	-	-3	dBm	
Extinction Ratio	ER	9.0	-		dB	
Center Wavelength	$\lambda_C$	1270	1310	1355	nm	
Spectral Line Width	$\Delta\lambda$	-	-	4	nm	
Optical Rise and Fall Time	$t_r / t_f$	-	-	260	ps	20% ~ 80%
Tx_DIS Voltage (DISABLE)	$V_{DIS}$	$V_{CC}-1.3$	-	$V_{CC}$	V	
Tx_DIS Voltage (ENABLE)	$V_{EN}$	$V_{ee}$	-	$V_{ee}+0.8$	V	

Receiver Electro-Optical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ )						
Parameter	Symbol	Min	Typ	Max	Units	Notes
Average Received Power (Max)	$P_{in\ max}$	-3	-	-	dBm	
Receive Sensitivity	$P_{in}$	-	-	-19	dBm	
Center Wavelength	$\lambda_C$	1100	1310	1600	nm	
Optical Return Loss	RL	12	-	-	dB	
Rx_LOS - Assert	$LOS_A$	-	-	-19	dBm	
Rx_LOS - De-Asserted	$LOS_D$	-30	-	-	dBm	
Rx_LOS - Hysteresis	-	0.5	-	5	dB	
Data Output Rise Time	$t_r$	-	-	400	ps	20% - 80%
Data Output Fall Time	$t_f$	-	-	400	ps	20% - 80%



Pin Assignment					
Pin	Symbol	Sequence	Pin	Symbol	Sequence
1	Rx_LOS	2	11	RGND	1
2	RGND	2	12	Rx_DAT (-)	1
3	RGND	2	13	Rx_DAT (+)	1
4	MOD_DEF(0)	2	14	RGND	1
5	MOD_DEF(1)	2	15	VCC <sub>R</sub>	2
6	MOD_DEF(2)	2	16	VCC <sub>T</sub>	2
7	Tx-DISABLE	2	17	TGND	1
8	TGND	2	18	Tx_DAT (+)	1
9	TGND	2	19	Tx_DAT (-)	1
10	Tx_FAULT	2	20	TGND	1

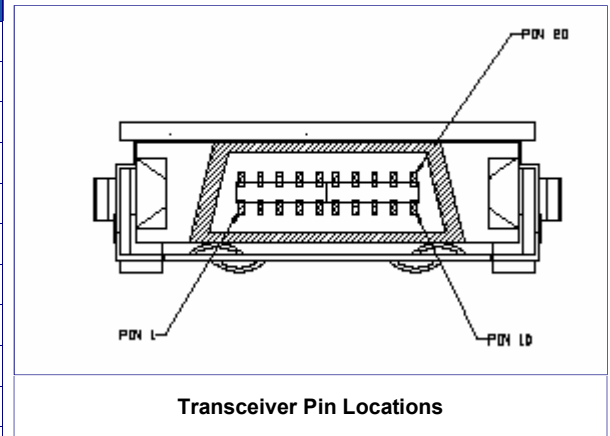


### Overview of Internal Signal Interface


Receiver Signals			
Symbol	Pin	Description	Notes
RxGND	2, 3, 11, 14	Receiver Ground (may be connected to TxGND in GBIC )	Ground
VCCR	15	Receiver +3.3/5.0 volt (may be connected to VCCT in GBIC)	Receiver DC power
Rx_DATA (-)	12	Receive Data, Inverted, Differential PECL	High speed serial data output
Rx_DATA (+)	13	Receive Data, Non-Inverted, Differential PECL	High speed serial data output
Rx_LOS	1	Receiver LOSS OF SIGNAL Logic LOW indicates NORMAL operation Requires 4.7 K to 10 K Ohm pull up to VCC <sub>R</sub> on host	TTL / LVTTTL Receiver monitor
Transmitter Signals			
TxBGD	8, 9, 17, 20	Transmitter Ground (may be internally connected to RxGND)	Ground
VCCT	16	+3.3 volt (may be connected to VCCR in GBIC)	Transmitter DC Power
Tx_DATA (+)	18	Transmit Data, Non-Inverted, Differential PECL	High speed serial data input
Tx_DATA (-)	19	Transmit Data, Inverted, Differential PECL	High speed serial data input
Tx_DIS	7	Transmit DISABLE Logic HIGH indicates that the transmitter is DISABLED Requires 4.7 K to 10 K Ohm pull up to VCCT on host	TTL / LVTTTL transmitter control
Tx_FAULT	10	Transmitter FAULT Logic LOW indicates that the transmitter is operating normally Open Collector Requires 4.7 K to 10 K Ohm pull up to VCCT on host	TTL / LVTTTL transmitter monitor
Control Signals			
MOD_DEF(0)	4	Two-Wire Serial Interface - Ground	
MOD_DEF(1)	5	Two-Wire Serial Interface - Clock Input Open Collector Requires 4.7 K to 10 K Ohm pull up to VCCT on host	
MOD_DEF(2)	6	Two-Wire Serial Interface - Serial Data Open Collector Requires 4.7 K to 10 K Ohm pull up to VCCT on host	



### Mechanical Dimensions

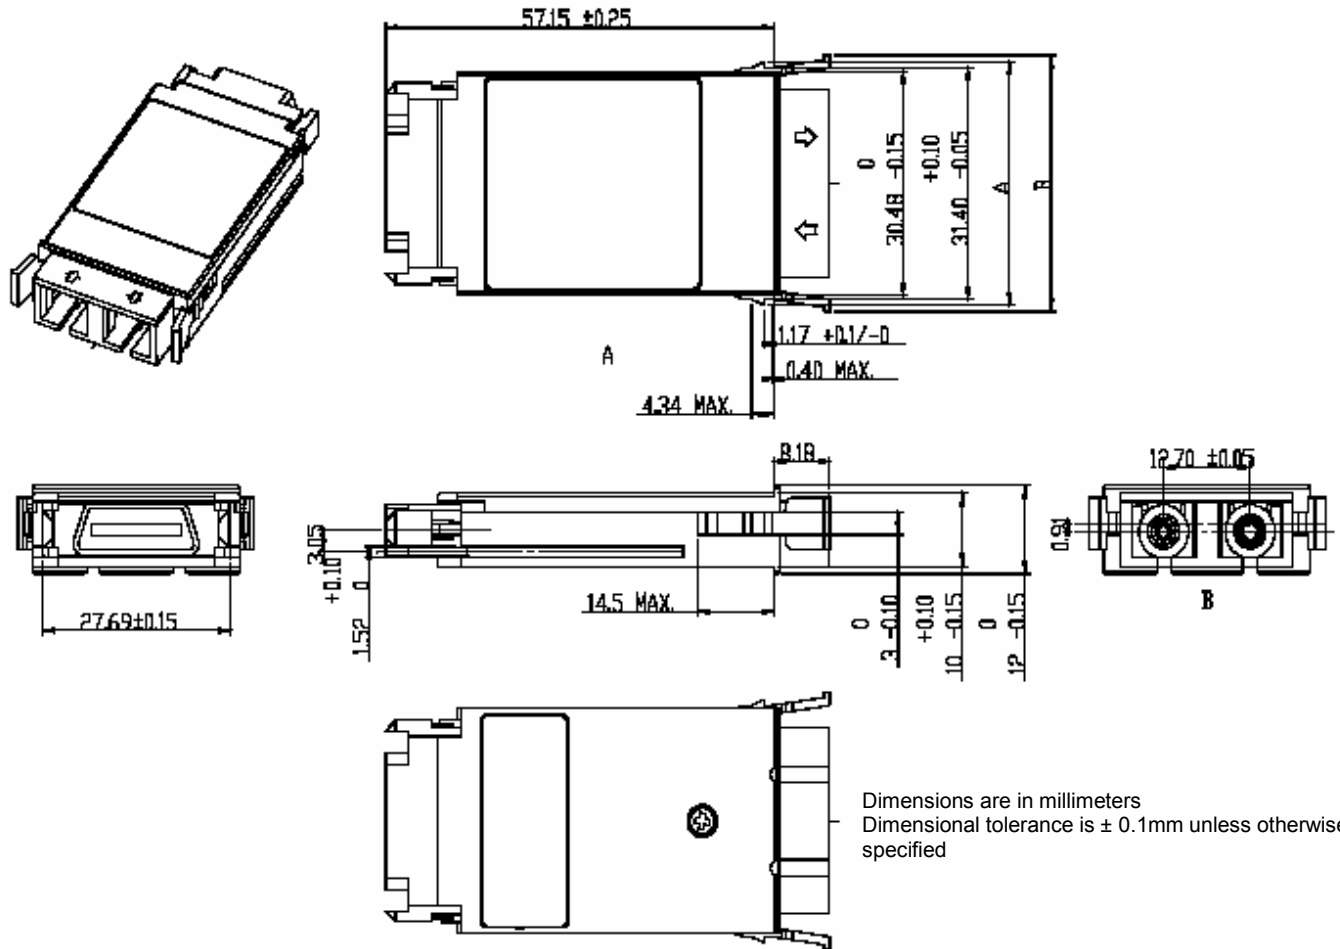


### Tx and Rx Eye Diagrams

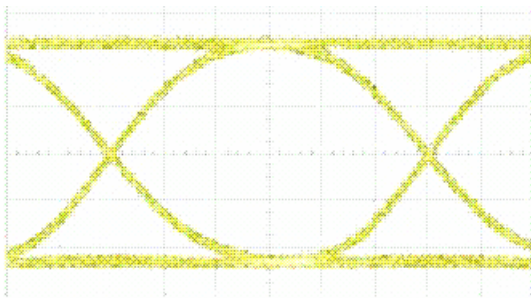

**Transmitter Test Conditions**

- Test Pattern =  $2^7-1$  NRZ PRBS

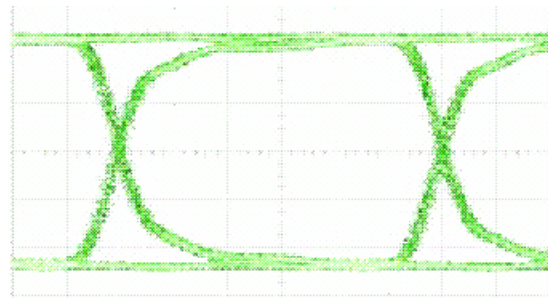

**Receiver Test Conditions**

- Test Pattern =  $2^7-1$  NRZ PRBS



### Regulatory Information

#### Eye Safety

The transceiver is a Class 1 eye-safe device according to FDA 21CFR1040.10 and IEC 60825-2.

#### Electromagnetic Interference (EMI), Immunity and Product Safety

The transceiver is ESD safe (electrical pins) when tested according to MIL-STD-883, Method 3015.7 and ESD safe (optical connector) when tested according to IEC 61000-4-2. The device is immune to strong RF fields when tested in accordance with IEC 61000-4-3. The device complies with (US) FCC, Part 15, Subpart J; (Europe) CENELEC EN 55022; (Canada) Class B (CISPR22A); and (Japan) VCCI Class 1. The device has been designed to conform to product safety requirements including UL1950, CSA 22.2, and IEC 60950-1, and has been designed to meet the flammability requirements of UL94.


#### Notice

The factory has made all adjustments to this device prior to shipment. No adjustments or modifications to the device are required or permitted. Any adjustment, modification or tampering of the device voids the product warranty. The US Food and Drug Administration may consider that any adjustment or modification to this device is an act of manufacturing and therefore will require that the device be recertified in accordance with 21 CFR 1040.10 Subpart j.


#### Laser Radiation Information

Wavelength	1310 nm
FDA Total Pout: 7 mm aperture at 20 cm distance	< 195 microwatts
IEC Total Pout : 7 mm aperture at 10 cm distance	< 15,600 microwatts
Beam Divergence	17.25°

#### Required Label

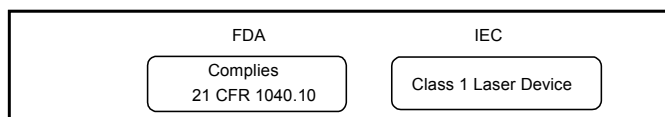

#### Laser Emission

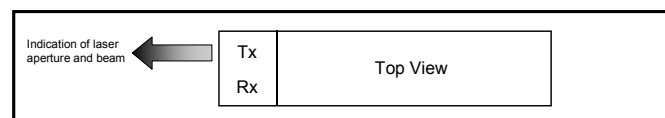

### Ligent Sales Offices - USA

#### Ligent Photonics, Inc.

2701 Dukane Drive  
Suite 200  
St. Charles, IL 60174  
PH (630) 513-7226  
FX (630) 513-9173  
WS www.ligentphotonics.com

#### Ligent Photonics, Inc.

(Virginia Sales Office)  
8210 Strathmore Lane  
Roanoke, VA 24019  
PH (540) 797-5793  
FX (540) 366-5793  
WS www.ligentphotonics.com

#### New Age Electronics

3000 Northwood's Parkway  
Suite 280  
Norcross, GA 30071  
PH (770) 242-8800  
FX (770) 242-8180  
WS www.newagelec.com

#### New Age Electronics

8376 Six Forks Road  
Suite 202  
Raleigh, NC 27615  
PH (919) 866-0620  
FX (919) 866-0621  
WS www.newagelec.com

#### New Age Electronics

4940 Corporate Drive  
Suite B  
Huntsville, AL 35805  
PH (256) 430-8000  
FX (256) 430-8414  
WS www.newagelec.com

#### K-Tech Sales

100 Century Center Court  
Suite 405  
San Jose, CA 95112  
PH (408) 437-1808  
FX (408) 437-1883  
WS www.ktechsales.com

#### Kruvand Associates

1202 Richardson Drive  
Suite 113  
Richardson, TX 75080  
PH (972) 437-3355  
FX (972) 680-8854  
WS www.kruvand.com

#### Kruvand Associates

8100 Shoal Creek Boulevard  
Suite 250  
Austin, TX 75080  
PH (512) 454-1111  
FX (512) 454-9858  
WS www.kruvand.com

#### Kruvand Associates

10601 Grant Road  
Suite 104  
Houston, TX 77070  
PH (713) 956-6741  
FX (713) 972-680-8854  
WS www.kruvand.com

#### VAL Technical Sales

183 Prospect Street  
Hingham, MA 02043  
PH (781) (781) 749-8358  
FX (781) 740-4663  
WS www.valtechnical.com

### Ligent Sales Offices - Asia

#### Hisense Optoelectronics Technology Co., Limited

No.11, Jiangxi Road  
Qingdao, Shandong  
China 266071  
PH 86 (532) 601-0000  
FX 86 (532) 601-6007  
WS www.hisenseopto.com

#### Summit Hisense Company, Limited

Triton Square  
Office Tower Z 19F 1-8-12  
Harumi Chuo-ku 104-6219  
Japan  
PH 81-3-5547-1252  
FX 81-3-5547-1268