



LTS1322 1x9 155 Mb/s SM Optical Transceiver ATM, FDDI, Fast Ethernet, OC-3, 1310 nm, 2 km, 5.0 V

Product Description

The LTS1321 single-mode duplex optical transceiver is designed for 2 km reach applications in 100 Mb/s high speed LAN/SAN (Fast Ethernet), 100 Mb/s ATM, 125 Mb/s FDDI, 155 Mb/s SONET OC-3 and 155 Mb/s SDH STM-1 optical communications equipment where low-cost, low power consumption, extraordinary performance and reliability are essential. It is housed in a compact MSA compliant 1x9 SIL plastic package with integral SC duplex optical receptacle and is designed to operate from a nominal 5.0 volt power source over the commercial temperature range of 0 to 70 degrees Centigrade (-40 to +85 degrees Centigrade is available upon request). The differential transmitter and receiver I/O signal interfaces are DC-coupled PECL. The signal detect monitor function is DC-coupled PECL.



Duplex SC 1x9 Transceiver

Applications

- 100 Mb/s ATM
- 100Mb/s 100 BASE -FX Fast Ethernet
- 125 Mb/s ANSI X3.184-1993 FDDI
- 155 Mb/s Telcordia SONET OC-3
- 155 Mb/s ITU-T G.957 SDH STM-1/ I-1
- Back to Back system interconnects
- Wiring closet interconnect
- Media Converters
- Hub interconnects
- Bus extenders
- Channel extenders
- Host adapter interconnects
- Mass storage system interconnects
- Router interconnects

Features

- 1x9 MSA compliant SIL package
- SC Duplex optical interface
- Single Mode operation
- 2 km reach
- +5.0 V power supply
- Low DC power consumption
- High performance 1310 nm F-P laser
- High sensitivity PIN/TIA optical receiver:
- BER < 1x10⁻¹⁰ (2²³ - 1 NRZ PRBS test pattern)
- Operating temperature range:
 - Commercial: 0 to 70°C (Standard)
 - Industrial: -40 to 85°C (Upon Request)
- Tx DATA Differential PECL, DC coupled
- Rx DATA Differential PECL, DC coupled
- Signal Detect Single Ended PECL, DC coupled

HOW TO ORDER

Part Number	Package Type (W)		Operating Voltage (X)		Rx_SD Option (Y)		Temperature Option (Z)	
LTS1322 S5PC	S	SC Receptacle	5	5.0 V	P	PECL	C	0 to 70 °C
							H	-40 to 85 °C



Ligent

intelligent photonics

LTS1322 1x9 155 Mb/s SM Optical Transceiver

ATM, FDDI, Fast Ethernet, OC-3, 1310 nm, 2 km, 5.0 V

Absolute Maximum Ratings					
Parameter	Symbol	Min	Max	Units	Notes
Storage Temperature	T_{stg}	-40	85	°C	
Operating Temperature	T_{amb}	0	70	°C	Temp Option "C"
Operating Temperature	T_{amb}	-40	85	°C	Temp Option "H"
Relative Humidity - Storage	RH_S	0	95	%	
Relative Humidity - Operating	RH_O	0	95	%	
Soldering Temperature	T_{sld}	0	260	°C	
Soldering Time Duration	t_{sld}	0	10	seconds	
DC Supply Voltage	V_{CC}	0	6.0	VDC	

Recommended Operating Conditions ($T_{amb} = 0$ to $+70^{\circ}\text{C}$, $V_{CC} = 5.0$ Volts)						
Parameter	Symbol	Min	Typ	Max	Units	Notes
DC Supply Voltage	V_{CC}	4.75	5.0	5.25	Volts	
DC Supply Current (Transmitter)	I_{CC}	-	55	120	mA	
DC Supply Current (Receiver)	I_{CC}	-	85	100	mA	Not including load current
Tx Data Input Voltage (HIGH)	$V_{IH-V_{CC}}$	-1.1	-	-0.74	V	
Tx Data Input Voltage (LOW)	$V_{IL-V_{CC}}$	-2.0	-	-1.58	V	
Tx Data Differential Input Voltage	V_{DIF}	550	-	1700	mVp-p	
Rx Data Output Voltage (HIGH)	$V_{IH-V_{CC}}$	-1.1	-	-0.74	V	
Rx Data Output Voltage (LOW)	$V_{IL-V_{CC}}$	-2.0	-	-1.58	V	
Rx Data Output AC Voltage	V_{opp}	-	800	-	mVp-p	Single terminal


Transmitter Optical and Electrical Characteristics						
Parameter	Symbol	Min	Typ	Max	Units	Note
Transmitter Type		1310 nm F-P Laser				
Center Wavelength	λ_C	1270	1310	1350	nm	1.3 μm F-P laser
Spectral Width (RMS)	$\Delta\lambda$	-	2	7	nm	-
Optical Rise / Fall Time	T_r / T_f	-	-	2	ns	20% to 80%
Total Jitter	T_J	-	-	2.2	ns	
Extinction Ratio	ER	10	-	-	dB	
Average Output Optical Power	P_o	-20	-	-14	dBm	
Optical Output Eye		ITU-T G.957 compliant (PRBS 2 ²³ -1 test pattern @155Mbps)				



Receiver Electro-Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Units	Notes
Receiver Type		1310 nm InGaAs PIN				
Receiver Optical Sensitivity	Pin	-	-	-32	dBm	BER = 1 ⁻¹⁰
Receiver Optical Overload	Pin max	-7	-	-	dBm	-
Center Wavelength	λ	1100	1310	1600	nm	-
Rx_DATA+/- Output Load Impedance	R _{OL}	-	50	-	Ohms	To (Vcc-2V)
SD (LVPECL) Output Load Impedance	R _{SDL}	-	50	-	Ohms	To (Vcc-2V)
Signal Detect Range	P _{SD}	-45	-	-32.5	dBm	AC Optical Signal
Signal Detect Hysteresis	P _{A-PD}	0.5	-	4	dB	-

SC Package Electrical Interface and Pin Description

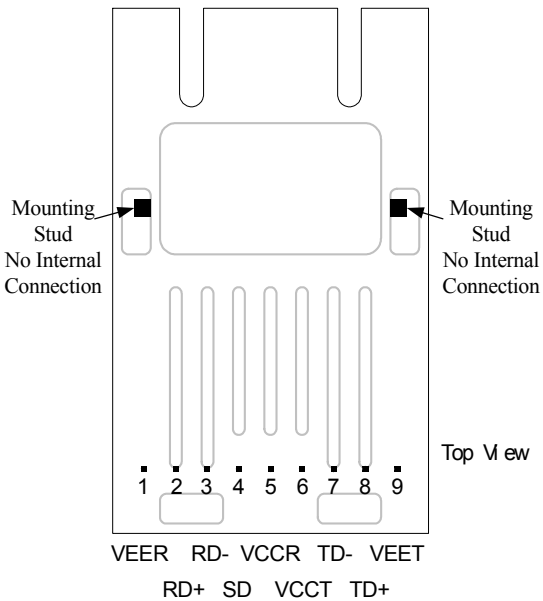


Pin	Symbol	Function
1	VEER	Receiver DC and Signal Ground
2	RD+	Rx_DATA Non-Inverted Differential Signal Output
3	RD-	Rx_DATA Inverted Differential Signal Output
4	SD	Rx_SD, LOW = No Signal, HIGH = Normal Operation
5	VCCR	Rx Positive Supply - Connected to +5.0 VDC
6	VCCT	Tx Positive Supply - Connected to +5.0 VDC
7	TD-	Tx_DATA Inverted Differential Signal Input
8	TD+	Tx_DATA Non-Inverted Differential Signal Input
9	VEET	Transmitter DC and Signal Ground

Operating Notes

- When Rx_SD is LOW, the Rx_DATA Non Inverted output goes LOW
- When Rx_SD is LOW, the Rx_DATA Inverted output goes HIGH
- When the optical input signal is above the receiver detection threshold, the Rx_SD monitor goes HIGH
- When the optical input signal is below the receiver detection threshold, the Rx_SD monitor goes LOW
- The Rx_DATA output and the Tx_DATA input differential I/O ports are PECL
- The Rx_SD monitor port interface is PECL

APPLICATIONS INFORMATION

Transceiver Block Diagram

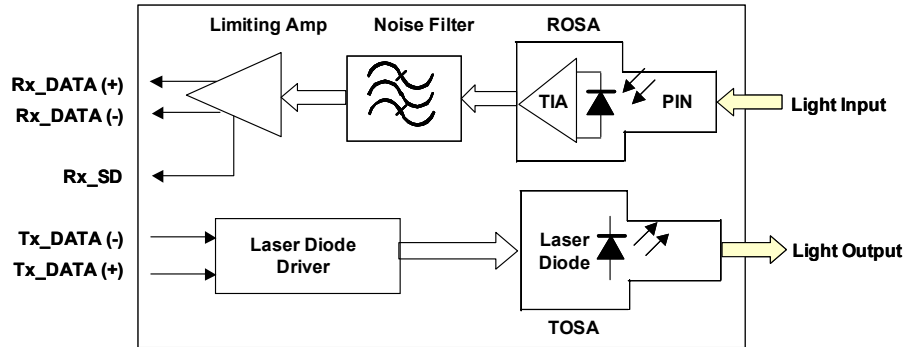

Transmitter Section

The transmitter incorporates optical and electrical subassemblies. The transmitting optical subassembly (TOSA) incorporates the high-speed Laser Diode and is characterized by its high efficiency and reliability, low threshold current and operating current and long life.

The transmitter electrical subassembly incorporates the PECL differential interface and high performance laser driver.

Receiver Section


The receiver incorporates optical and electrical subassemblies. The receiver optical subassembly (ROSA) incorporates a planar InGaAs PIN photo detector and the optical input receptacle. The high-reliability photo detector is characterized by its low dark current. The receiver electronics includes an integrated low noise preamplifier and AGC amplifier (TIA), which are mounted in a TO-Metal Can assembly with the photo detector. The output of the TIA drives the band pass filter (BPF) that limits the noise contribution of the received signal and improves the overall sensitivity of the receiver. The filtered BPF signal drives the small signal limiting amplifier. The differential output of the limiting amplifier is designed to drive PECL interface circuits. The receiver monitor function, Rx_SD, is designed to operate with a PECL logic interface.

Electrical Interface Circuit

Electrical Interface Circuit Component Values							
Interface	R1	R2	R5	R6	C1	C2	L1
5.0 V / PECL	82 Ω	130 Ω	130 Ω	82 Ω	100 nF	10 μF	1 μHy

Notes

- High-speed circuit design rules and impedance matching are recommended for optimum performance.
- The recommended I/O termination is 50 ohms.
- Although differential signal transmission is preferred, single ended operation may be used.
- The bypass capacitors should be rated for RF service.
- The power supply de-coupling chokes should be rated for RF service and should have low series resistance.

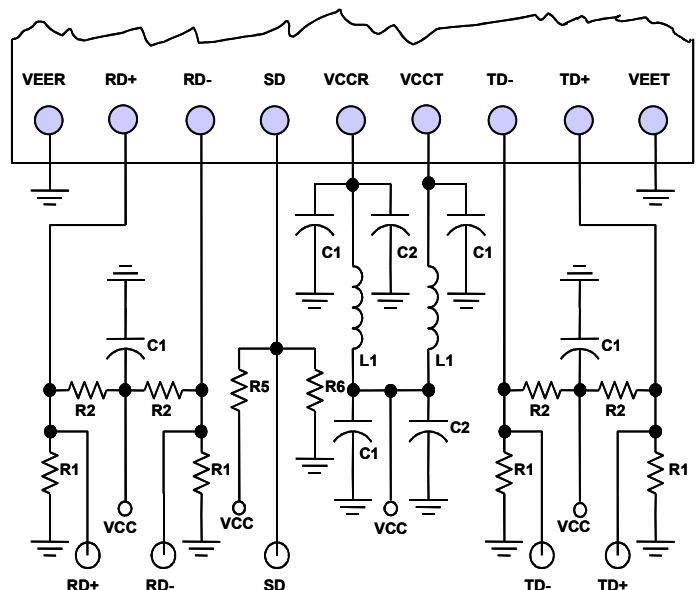




LTS1322 1x9 155 Mb/s SM Optical Transceiver

ATM, FDDI, Fast Ethernet, OC-3, 1310 nm, 2 km, 5.0 V

1x9 Duplex Transceiver with SC Duplex Receptacle

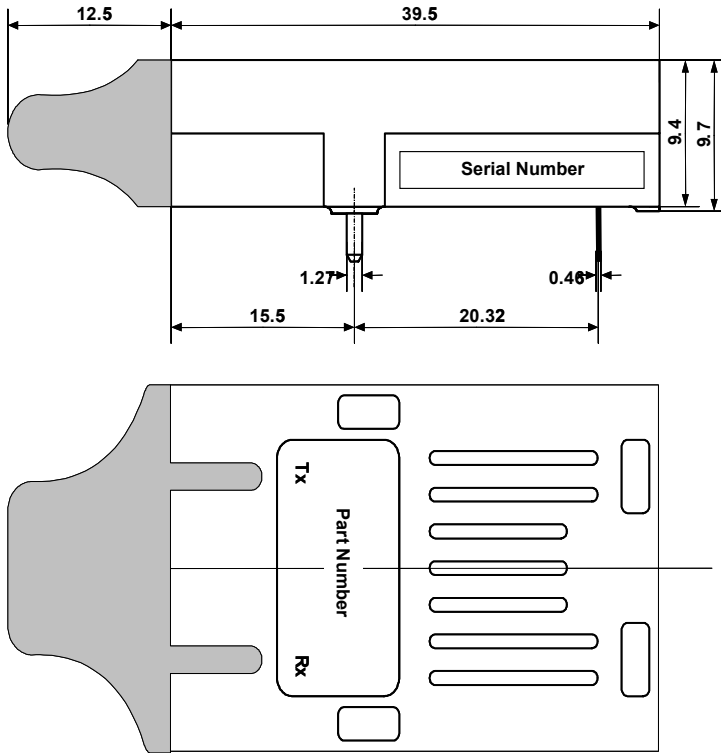

- Dimensions are in millimeters
- The holes for the mounting studs are 1.9 mm diameter
- The holes for the 9 electrical pins are 0.8 mm diameter
- Dimensional tolerances are ± 0.1 mm unless otherwise specified

Regulatory Requirements

Eye Safety

The transceiver is a Class 1 eye-safe device according to FDA 21CFR1040.10 and IEC 60825-2.

Electromagnetic Interference (EMI), Immunity and Product Safety

The transceiver is ESD safe (electrical pins) when tested according to MIL-STD-883, Method 3015.7 and ESD safe (optical connector) when tested according to IEC 61000-4-2. The device is immune to strong RF fields when tested in accordance with IEC 61000-4-3. The device complies with (US) FCC, Part 15, Subpart J; (Europe) CENELEC EN 55022; (Canada) Class B (CISPR22A); and (Japan) VCCI Class 1. The device has been designed to conform to product safety requirements including UL1950, CSA 22.2, and IEC 60950-1, and has been designed to meet the flammability requirements of UL94.


Notice

The factory has made all adjustments to this device prior to shipment. No adjustments or modifications to the device are required or permitted. Any adjustment, modification or tampering of the device voids the product warranty. The US Food and Drug Administration may consider that any adjustment or modification to this device is an act of manufacturing and therefore will require that the device be recertified in accordance with 21 CFR 1040.10 Subpart j.


Laser Radiation Information

Wavelength	1310 nm
FDA Total Pout: 7 mm aperture at 20 cm distance	< 195 microwatts
IEC Total Pout : 7 mm aperture at 10 cm distance	< 15,600 microwatts
Beam Divergence	17.25°

Required Label



Laser Emission





Ligent

intelligent photonics

LTS1322 1x9 155 Mb/s SM Optical Transceiver

ATM, FDDI, Fast Ethernet, OC-3, 1310 nm, 2 km, 5.0 V

North American Sales Offices

Ligent Photonics

2701 Dukane Drive
Suite 200
St. Charles, IL 60174
PH (630) 513-7226
FX (630) 513-9173
WS www.ligentphotonics.com

Ligent Photonics

(Virginia Sales Office)
8210 Strathmore Lane
Roanoke, VA 24019
PH (540) 797-5793
FX (540) 366-5793
WS www.ligentphotonics.com

Gigatron Associates

968 St. Laurent Boulevard
Ottawa, Ontario K1K 3B3
PH (613) 747-3472
FX (613) 747-3474
WS www.gigatron.com

Gigatron Associates

56 Bartleman Crescent
Cambridge, ON
PH: (519) 220-1856
FX: (510) 220-1938
WS: www.gigatron.com

Gigatron Associates

450 Avenue Racine PH #5
Dorval, QB H9S 3K8
PH: (514) 984-2598
FX: (514) 620-7812
WS: www.gigatron.com

Gigatron Associates

2388 Eversyde Avenue SW
Calgary, AB T2Y 4X6
PH: (403) 257-0636
FX: (403) 257-0569
www.gigatron.com

Gigatron Associates

406-838 Agnes Street
New Westminster, BC V3M 6R3
PH: (604) 787-2340
FX: (604) 787-2343
WS: www.gigatron.com

New Age Electronics

3000 Northwood's Parkway
Suite 280
Norcross, GA 30071
PH (770) 242-8800
FX (770) 242-8180
WS www.newagelec.com

New Age Electronics

8376 Six Forks Road
Suite 202
Raleigh, NC 27615
PH (919) 866-0620
FX (919) 866-0621
WS www.newagelec.com

New Age Electronics

4900 Corporate Drive
Suite B
Huntsville, AL 35805
PH (256) 430-8000
FX (256) 430-8414
WS www.newagelec.com

New Age Electronics

182 Sunset Drive
Mt. Dora, FL 32757
PH: (352) 735-6101
FX: (352) 735-6116
WS: www.newagelec.com

New Age Electronics

100 SE 5th Court
Suite 37
Pompano Beach, FL 33060
PH: (407) 804-1210
FX: (954) 928-2889
WS: www.newagelec.com

KJS Marketing

PO Box 72
Crystal Lake, IL 60039
PH (815) 788-1002
FX (815) 788-1004
WS www.kjsmarketing.com

KJS Marketing

4610 Hemlock Lane North
Plymouth, MN 55442
PH (763) 205-1402
FX (763) 205-1403
WS www.kjsmarketing.com

KJS Marketing

2A Street
Lake Lotawana, MO 64086
PH (816) 578-4751
FX (816) 774-2571
WS www.kjsmarketing.com

KJS Marketing

1802 Hammer Drive, NW
Cedar Rapids, IA 52405
PH (319) 265-8592
FX (319) 265-8593
WS www.kjsmarketing.com

KJS Marketing

PO Box 1521
Maryland Heights, MO 63043
PH (314) 469-4544
FX (314) 469-4535
WS www.kjsmarketing.com

Kruvand Associates

1202 Richardson Drive
Suite 113
Richardson, TX 75080
PH (972) 437-3355
FX (972) 680-8854
WS www.kruvand.com

Kruvand Associates

8100 Shoal Creek Boulevard
Suite 250
Austin, TX 75080
PH (512) 454-1111
FX (512) 454-9858
WS www.kruvand.com

Kruvand Associates

10601 Grant Road
Suite 104
Houston, TX 77070
PH (713) 956-6741
FX (713) 972-680-8854
WS www.kruvand.com

K-Tech Sales

100 Century Center Court
Suite 405
San Jose, CA 95112
PH (408) 437-1808
FX (408) 437-1883
WS www.ktechsales.com